

2U RACK HANDLE

SPECIFICATIONS:

HANDLES

DESCRIPTION: EIA-310 compliant 2U rack handle with captive screws to secure enclosure to rack

MATERIAL: Bayer Bayblend PC/ABS polymer

RATED STRENGTH: 100lbs per handle, straight pull

FLAMMABILITY: NEBS compliant UL94 V-0, IEC 60335-1

ECOLABELS: RoHS, Blue Angel, Nordic Swan, TCO,

WEEE, EU Flower

CAPTIVE SCREWS

DESCRIPTION: ANSI #10-32 captive phillips pan head

MATERIAL: 18-8 stainless steel



MOUNTING SCREWS

DESCRIPTION: #10-14x5/8" flat head plastite thread forming

MATERIAL: zinc plated steel

SCOPE OF SUPPLY


The kit part number includes 2 handles, 4 mounting screws and 4 captive screws packaged in a ziplock bag.

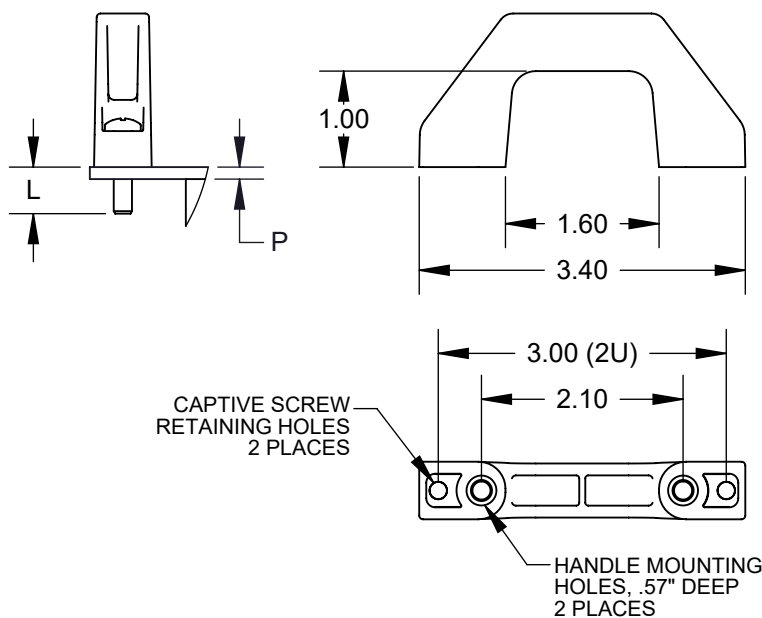

DIMENSIONS
IN INCHES
TOLS: $\pm .01$

KIT PART NUMBERS		
PANEL THICKNESS "P"	"L"	PART NO.
.059-.090"	.435"	3002-059
.100-.134"	.485"	3002-100
.160-.190"	.535"	3002-160
.375 $\pm .015$ "	.750"	3002-375
NO SCREWS!		3002

Part numbers shown ensure complete screw engagement with tapped or cage-nut style rack rails. For dedicated tapped rail applications a shorter screw may be used. Example: 3002-059 will work with a .125" panel and tapped rails.

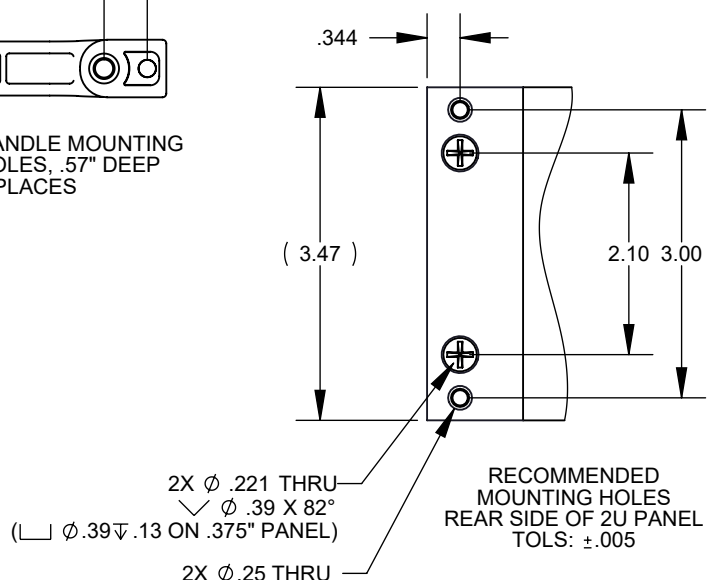

PITON
engineering