

3U RACK HANDLE

SPECIFICATIONS:

HANDLES

DESCRIPTION: EIA-310 compliant 3U rack handle with captive screws to secure enclosure to rack
 MATERIAL: Bayer Bayblend PC/ABS polymer
 RATED STRENGTH: 100lbs per handle, straight pull
 FLAMMABILITY: NEBS compliant UL94 V-0, IEC 60335-1
 ECOLABELS: RoHS, Blue Angel, Nordic Swan, TCO, WEEE, EU Flower

CAPTIVE SCREWS



DESCRIPTION: ANSI #10-32 captive phillips pan head
 MATERIAL: 18-8 stainless steel

MOUNTING SCREWS


DESCRIPTION: #10-14x5/8" flat head plastite thread forming
 MATERIAL: zinc plated steel

SCOPE OF SUPPLY

The kit part number includes 2 handles, 4 mounting screws and 4 captive screws packaged in a ziplock bag.

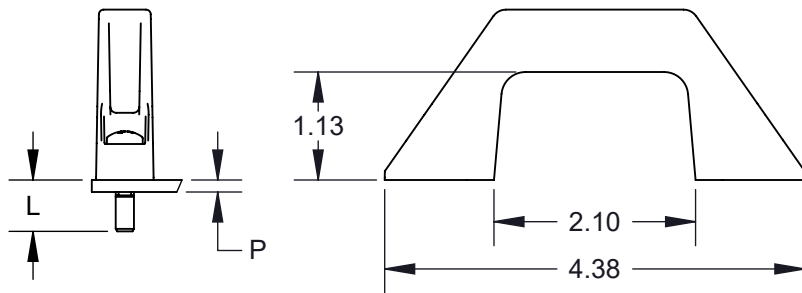


DIMENSIONS
IN INCHES
TOLS: $\pm .01$

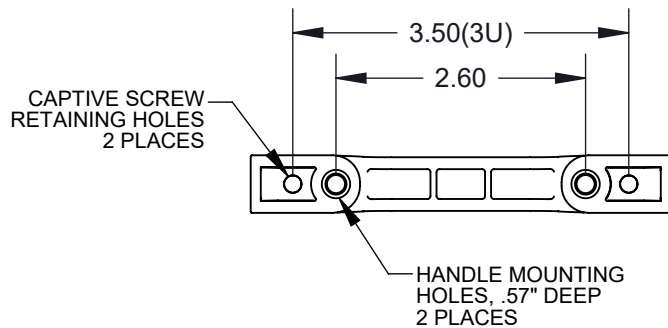

KIT PART NUMBERS		
PANEL THICKNESS "P"	"L"	PART NO.
.059-.090"	.435"	3003-059
.100-.134"	.485"	3003-100
.160-.190"	.535"	3003-160
.375 $\pm$.015"	.750"	3003-375
NO SCREWS!		3003

Part numbers shown ensure complete screw engagement with tapped or cage-nut style rack rails. For dedicated tapped rail applications a shorter screw may be used.
 Example: 3003-059 will work with a .125" panel and tapped rails.

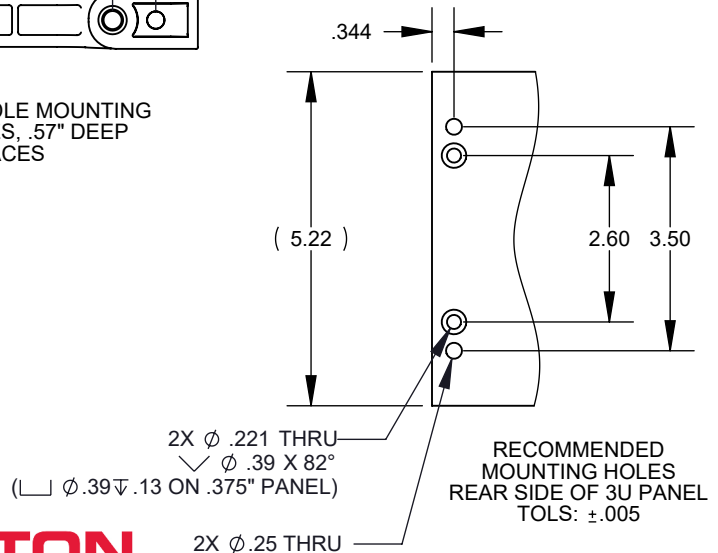

PITON
engineering